

**9V**


**Cylindrical Alkaline Battery**

@ Specification

Cross Reference: IEC-6LR61

<b>Nominal Voltage (V)</b>		<b>9.0</b>	
<b>Dimensions</b>	<b>Length (mm)</b>	<b>26.5<sup>+0</sup>/<sub>-2</sub></b>	
	<b>Width (mm)</b>	<b>17.5<sup>+0</sup>/<sub>-2</sub></b>	
	<b>Height (mm)</b>	<b>48.5<sup>+0</sup>/<sub>-2</sub></b>	
	<b>Apx. Weight (g)</b>	<b>47.0</b>	
<b>Test condition</b>			<b>Duration</b>
<b>Load Resistance</b>	<b>Discharging Time Per Day</b>	<b>Cut-off Voltage</b>	
<b>620 ohm</b>	<b>2h/d</b>	<b>5.4V</b>	
<b>180 ohm</b>	<b>30min/d</b>	<b>4.8V</b>	
<b>270 ohm</b>	<b>1h/d</b>	<b>5.4V</b>	



@ Dimensions

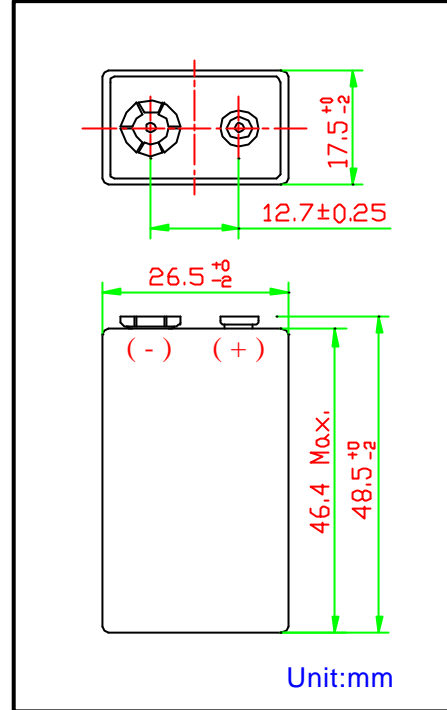

@ Typical Discharge Characteristics

Loaded at 180 ohm, 30min/d, @20°C

Loaded at 620 ohm, 2h/d, @20°C

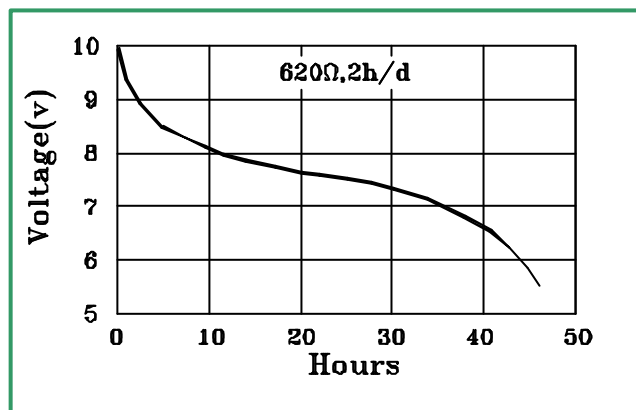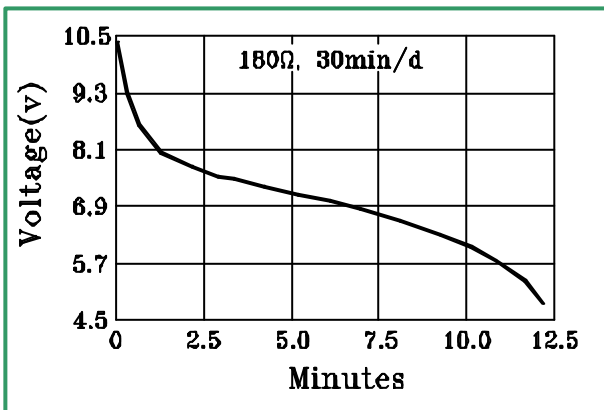

Add: No.2, Gutang'ao Industrial Area, Huizhou, Guangdong, China  
P.C.: 516008  
Tel: +86-752-2382997, +86-13502288850  
Fax: +86-752-2382786  
Website: [www.cn-battery.net](http://www.cn-battery.net)  
E-mail: [zhou01@yeah.net](mailto:zhou01@yeah.net)

