

AAA


Cylindrical Alkaline Battery

@ Specifications

Cross Reference: IEC-LR03

@ Dimensions



Nominal Voltage (V)		1.5	
Dimensions	Diameter (mm)	9.5-10.5	
	Height (mm)	43.3-44.5	
	Apx. Weight (g)	11.5	
Test condition			
Load Resistance	Discharging Time Per Day	Cut-off Voltage	Duration
75 ohm	4h/d	0.9V	61.0h
10 ohm	1h/d	0.9V	7.0h
5.1 ohm	4min/h, 8h/d	0.9V	165min
600 mA	10s/min, 1h/d	0.9V	265 times
20 ohm	24h/d	0.9V	16.0h
10 ohm	24h/d	0.9V	6.9h

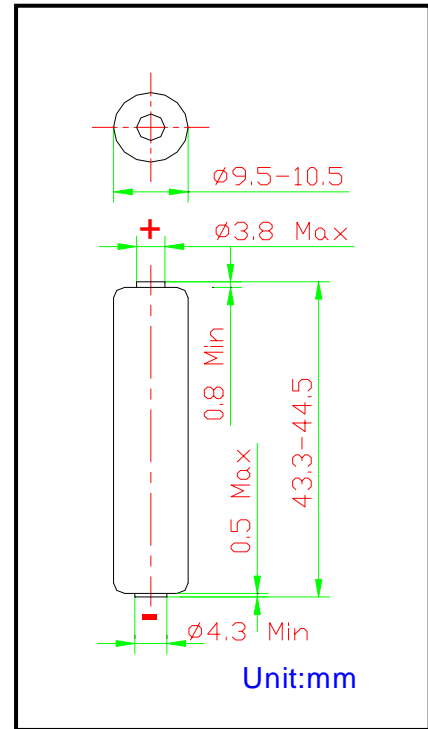

@ Typical Discharge Characteristics

Loaded at 3.6 ohm, 15 spm

Loaded at 10 ohm, 20ohm

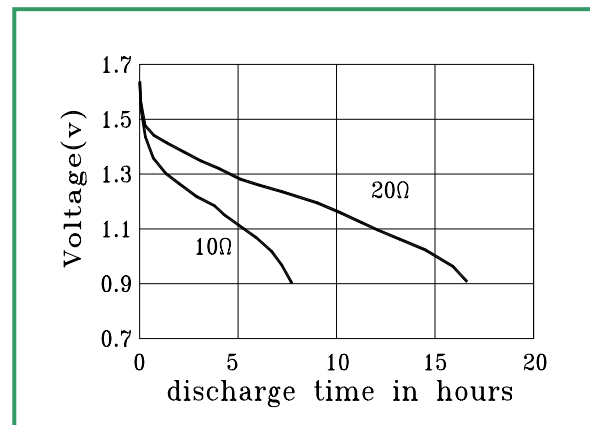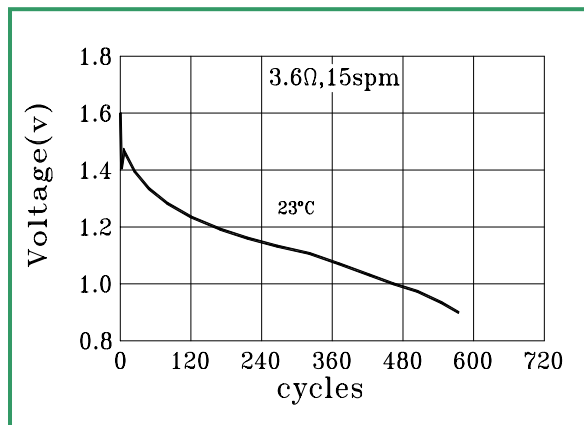

Add: No.2, Gutang'ao Industrial Area, Huizhou, Guangdong, China
 P.C.: 516008
 Tel: +86-752-2382997, +86-13502288850
 Fax: +86-752-2382786
 Website: www.cn-battery.net
 E-mail: zhou01@yeah.net

