

**N**


**Cylindrical Alkaline Battery**

@ Specification

Cross Reference: IEC-LR1

<b>Nominal Voltage (V)</b>		<b>1.5</b>	
<b>Dimensions</b>	<b>Diameter (mm)</b>	<b>12.0<sup>+0</sup>/<sub>-1.1</sub></b>	
	<b>Height (mm)</b>	<b>30.2<sup>+0</sup>/<sub>-1.1</sub></b>	
	<b>Apx. Weight (g)</b>	<b>9.5</b>	
<b>Test condition</b>			
<b>Load Resistance</b>	<b>Discharging Time Per Day</b>	<b>Cut-off Voltage</b>	<b>Duration</b>
5.1 ohm	5min/d	0.9V	130min
300 ohm	12h/d	0.9V	220h
3.9 ohm	24h/d	0.8V	70min
3010 ohm	5s/h, 24h/d	0.9V	1100h



@ Dimensions

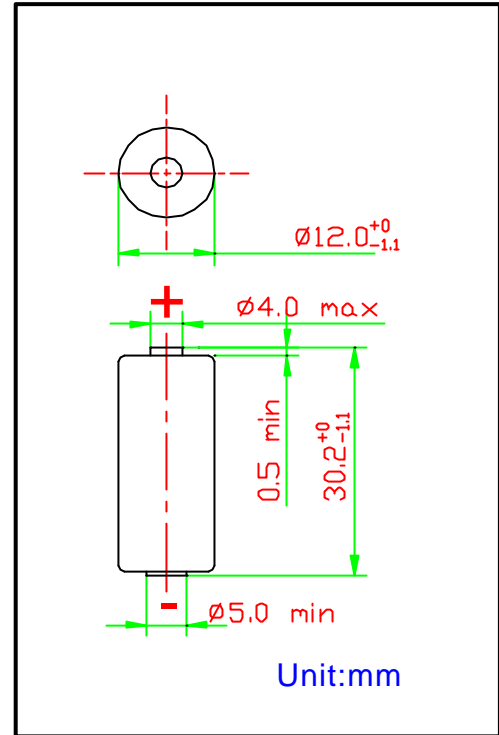

@ Typical Discharge Characteristics

Loaded at 5.1 ohm, 5min/d, @20°C

Loaded at 300 ohm, 12h/d, @20°C

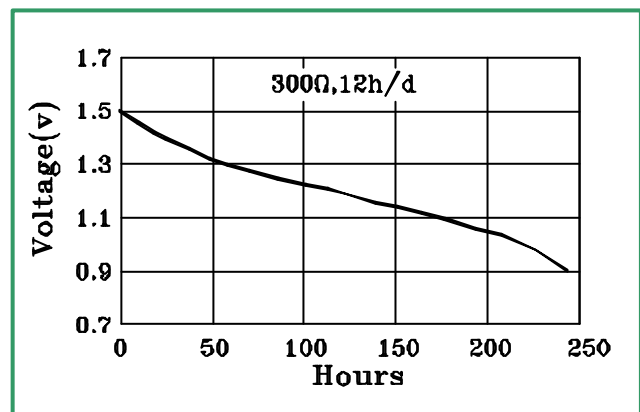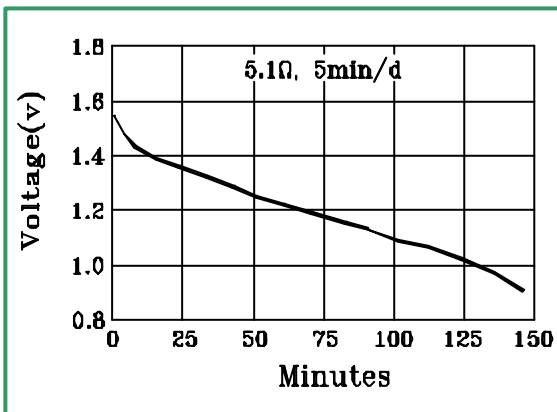

Add: No.2, Gutang'ao Industrial Area, Huizhou, Guangdong, China  
 P.C.: 516008  
 Tel: +86-752-2382997, +86-13502288850  
 Fax: +86-752-2382786  
 Website: [www.cn-battery.net](http://www.cn-battery.net)  
 E-mail: [zhou01@yeah.net](mailto:zhou01@yeah.net)

