

C


Cylindrical Alkaline Battery

@ Specification

Cross Reference: IEC-LR14

Nominal Voltage (V)		1.5	
Dimensions	Diameter (mm)	25.7+/-0.2	
	Height (mm)	49.7+/-0.3	
	Apx. Weight (g)	65	
Test condition			
Load Resistance	Discharging Time Per Day	Cut-off Voltage	Duration
20 ohm	4h/d	0.9V	
3.9 ohm	1h/d	0.8V	105.0h
6.8 ohm	1h/d	0.9V	18.0h
3.9 ohm	4min/h, 8h/d	0.9V	30.0h
3.9 ohm	24h/d	0.9V	1050min
3.9 ohm	24h/d	0.9V	15.0h



@ Dimensions

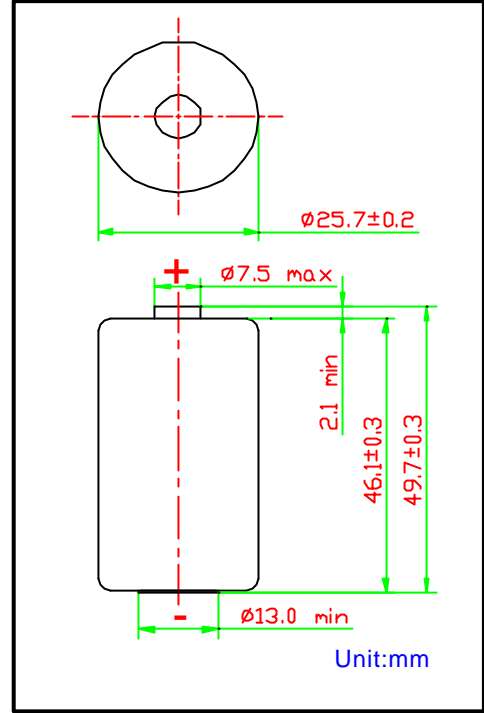

@ Typical Discharge Characteristics

Loaded at 3.9 ohm, 1 h.p.d.

Loaded at 3.9 ohm

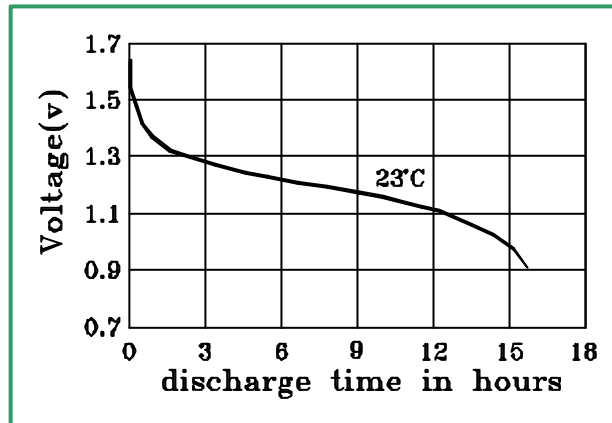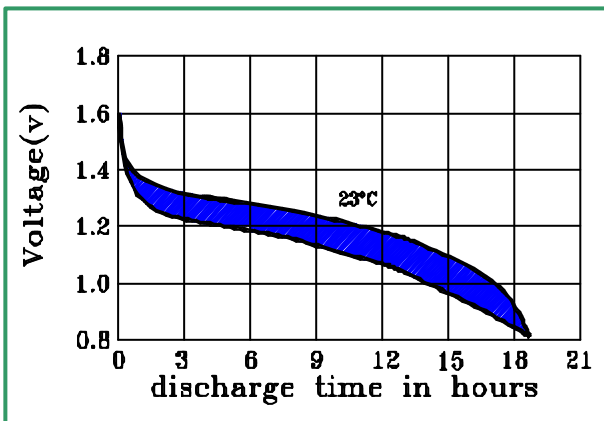

Add: No.2, Gutang'ao Industrial Area, Huizhou, Guangdong, China
P.C.: 516008
Tel: +86-752-2382997, +86-13502288850
Fax: +86-752-2382786
Website: www.cn-battery.net
E-mail: zhou01@yeah.net

