

D


Cylindrical Alkaline Battery

@ Specification

Cross Reference: IEC-LR20

Nominal Voltage (V)		1.5	
Dimensions	Diameter (mm)	33.1+/-0.2	
	Height (mm)	61.2+/-0.3	
	Apx. Weight (g)	135	
Test condition			
Load Resistance	Discharging Time Per Day	Cut-off Voltage	Duration
10 ohm	4h/d	0.9V	110.0h
3.9 ohm	1h/d	0.9V	33.0h
2.2 ohm	1h/d	0.8V	21.0h
2.2 ohm	4min/h, 8h/d	0.9V	1150min
1.5 ohm	4min/15min, 8h/d	0.9V	600min
3.9 ohm	24h/d	0.9V	25.0h



@ Dimensions

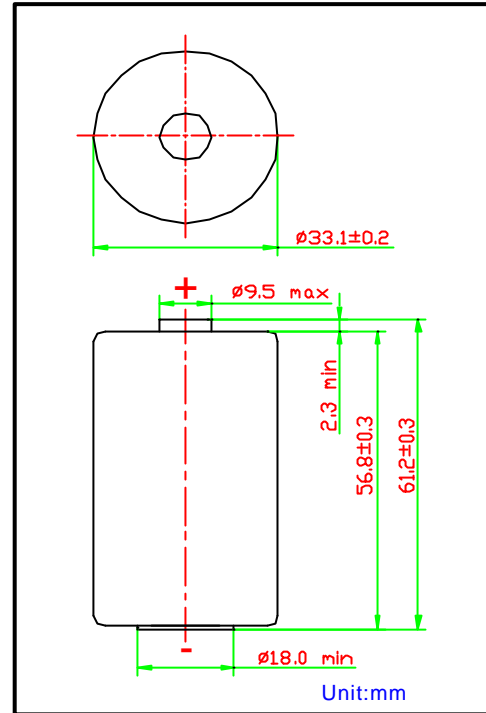

@ Typical Discharge Characteristics

Loaded at 3.9 ohm, 1 h.p.d.

Loaded at 3.9 ohm

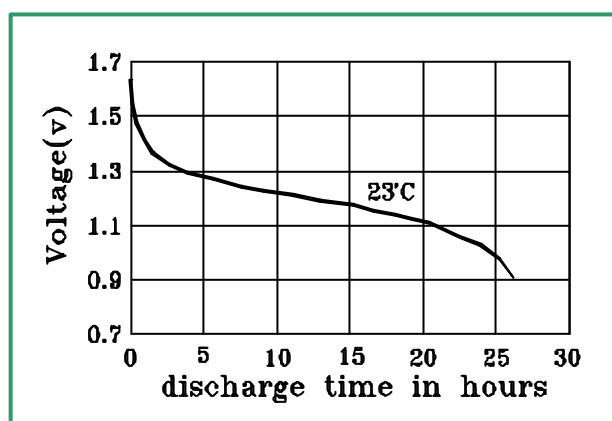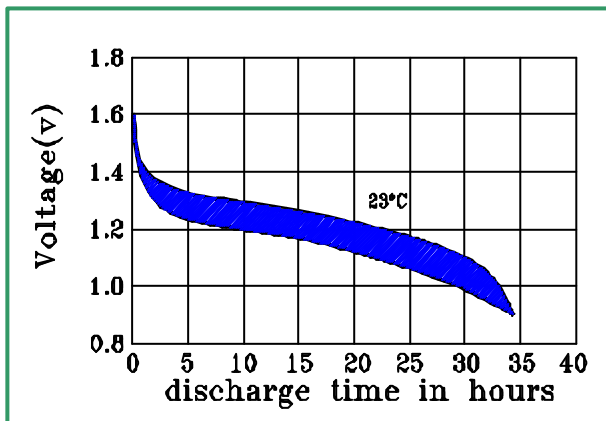

Add: No.2, Gutang'ao Industrial Area, Huizhou, Guangdong, China
 P.C.: 516008
 Tel: +86-752-2382997, +86-13502288850
 Fax: +86-752-2382786
 Website: www.cn-battery.net
 E-mail: zhou01@yeah.net

