




Cylindrical Alkaline Battery

@ Specifications

Cross Reference: IEC-LR6

Nominal Voltage (V)		1.5	
Dimensions	Diameter (mm)	13.5-14.5	
	Height (mm)	49.2-50.5	
	Apx. Weight (g)	23.5	
Test condition			
Load Resistance	Discharging Time Per Day	Cut-off Voltage	Duration
43 ohm	4h/d	0.9V	80.0h
10 ohm	1h/d	0.9V	16.5h
3.9 ohm	1h/d	0.8V	6.0h
1000mA	10s/min, 1h/d	0.9V	280 times
10 ohm	24h/d	0.9V	16.2h
3.9 ohm	24h/d	0.9V	5.0h



@ Dimensions

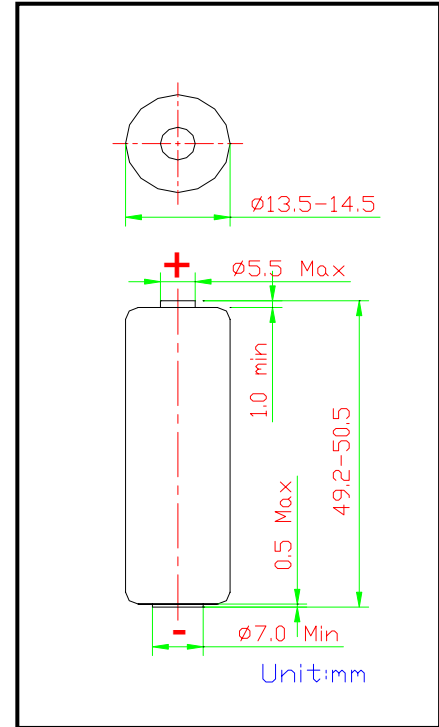

@ Typical Discharge Characteristics

Loaded at 1.8 ohm, 15 spm

Loaded at 3.9 ohm, 10ohm

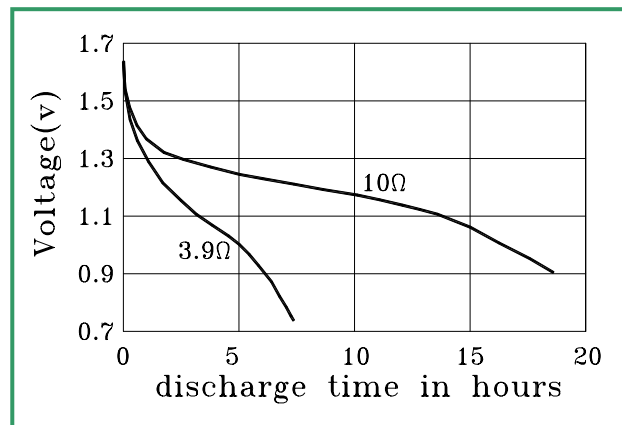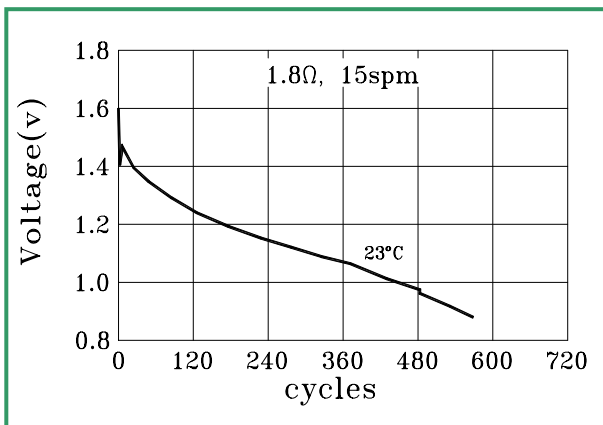

Add: No.2, Gutang'ao Industrial Area, Huizhou, Guangdong, China
 P.C.: 516008
 Tel: +86-752-2382997, +86-13502288850
 Fax: +86-752-2382786
 Website: www.cn-battery.net
 E-mail: zhou01@yeah.net

