

FR14505


Cylindrical Lithium Battery

@ Specification

Reference Size: AA



| | | |
|-------------------|--|------------------|
| Dimensions | Nominal Voltage (V) | 1.5 |
| | Diameter (mm) | 14.5 Max. |
| | Height (mm) | 50.5 Max. |
| | Apx. Weight (g) | 16 |
| | Standard Discharge Current (mA) | 200 |
| | Nominal Capacity (mAh) | 3000 |
| | Maximum Continuous Discharge Current (mA) | 2000 |
| | Maximum pulse Discharge Current (mA) | 2500 |
| | Temperature Range (°C) | -40/60 |

@ Dimensions

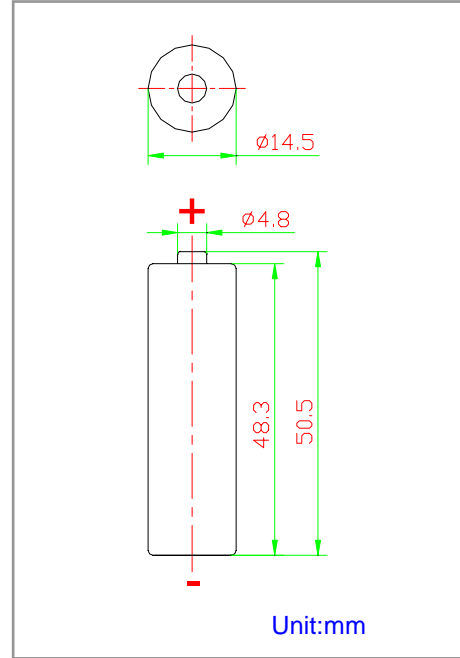

@ Discharge Characteristics vs. Temp.

@ Pulse Discharge Characteristics

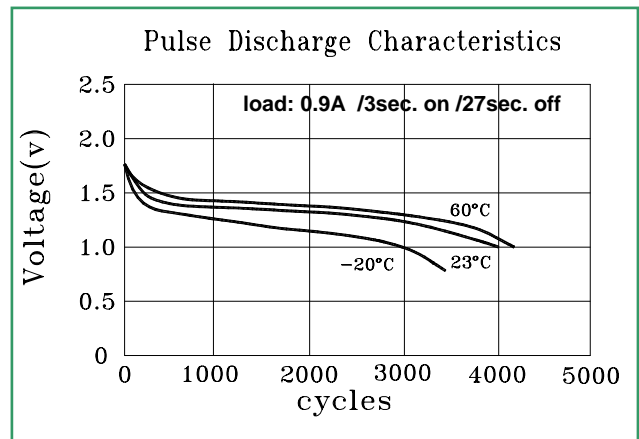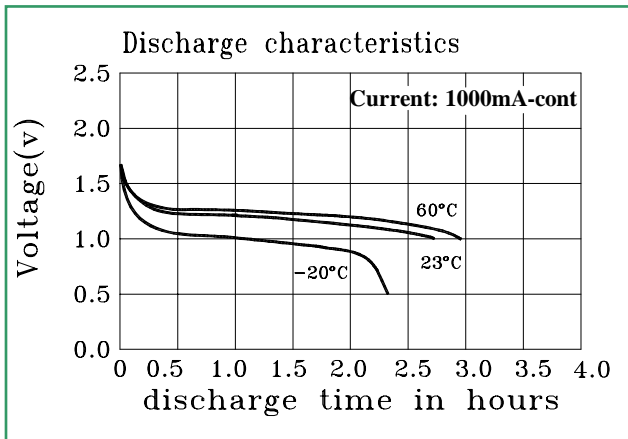

Add: No.2, Gutang'ao Industrial Area, Huizhou, Guangdong, China
P.C.: 516008
Tel: +86-752-2382997, +86-13502288850
Fax: +86-752-2382786
Website: www.cn-battery.net
E-mail: zhou01@yeah.net

