


CR-V3

Cylindrical Lithium Battery


@ Specification

Nominal Voltage (V)		3.0
Dimensions	Length (mm)	28.6(Max.)
	Width (mm)	14.4(Max.)
	Height (mm)	52.2(Max.)
	Apx. Weight (g)	35
Standard Discharge Current (mA)		20
Nominal Capacity (mAh)		2700
Maximum Continuous Discharge Current (mA)		2000
Maximum pulse Discharge Current (mA)		5000
Temperature Range (°C)		-40/70


@ Dimensions

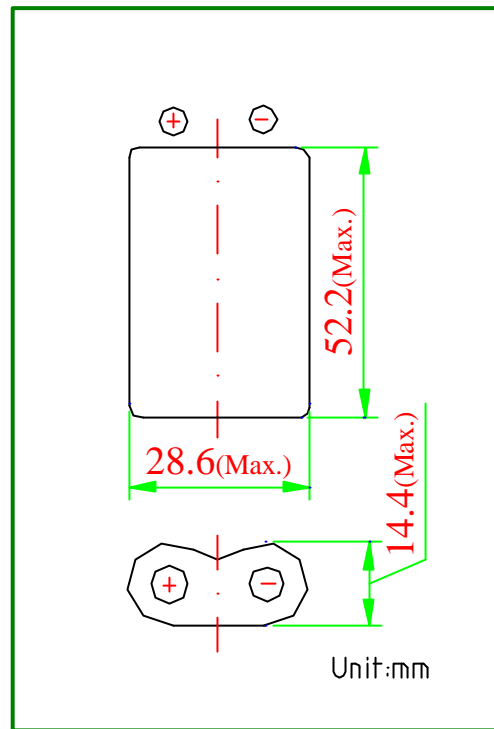

@ Discharge Characteristics vs. Temp.

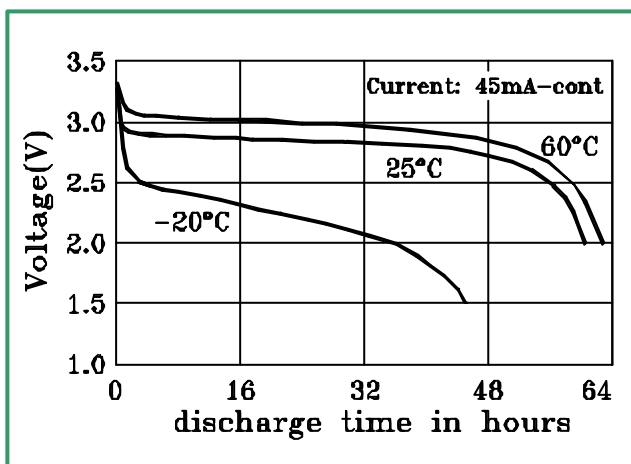

@ Pulse Discharge Characteristics

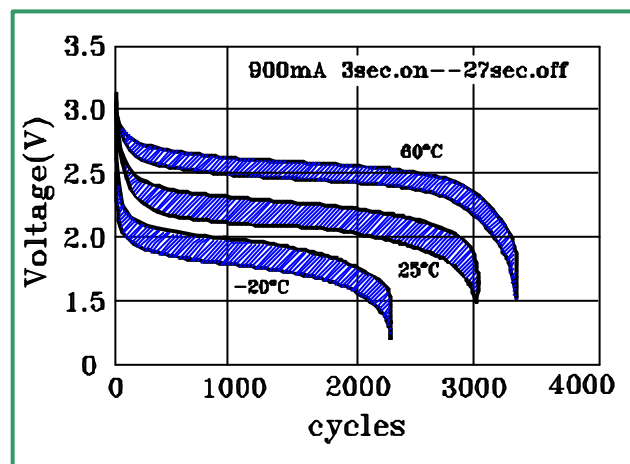

Add: No.2, Gutang'ao Industrial Area, Huizhou, Guangdong, China
P.C.: 516008
Tel: +86-752-2382997, +86-13502288850
Fax: +86-752-2382786
Website: www.cn-battery.net
E-mail: zhou01@yeah.net

