

# CR123A


## Cylindrical Lithium Battery

### @ Specification


Reference size: CR17345

|  |                        |                   |             |
|--|------------------------|-------------------|-------------|
| <b>Nominal Voltage (V)</b>                       |                        | <b>3.0</b>        |             |
| <b>Dimensions</b>                                | <b>Diameter (mm)</b>   | <b>16.7+/-0.3</b> |             |
|  | <b>Height (mm)</b>     | <b>34.2+/-0.3</b> |             |
|  | <b>Apx. Weight (g)</b> | <b>16.5</b>       |             |
| <b>Standard Discharge Current (mA)</b>           |                        | <b>20</b>         | <b>1</b>    |
| <b>Nominal Capacity (mAh)</b>                    |                        | <b>1500</b>       | <b>2000</b> |
| <b>Maximum Continuous Discharge Current (mA)</b> |                        | <b>1000</b>       |             |
| <b>Maximum pulse Discharge Current (mA)</b>      |                        | <b>3000</b>       |             |
| <b>Temperature Range (°C)</b>                    |                        | <b>-40/60</b>     |             |


### @ Dimensions

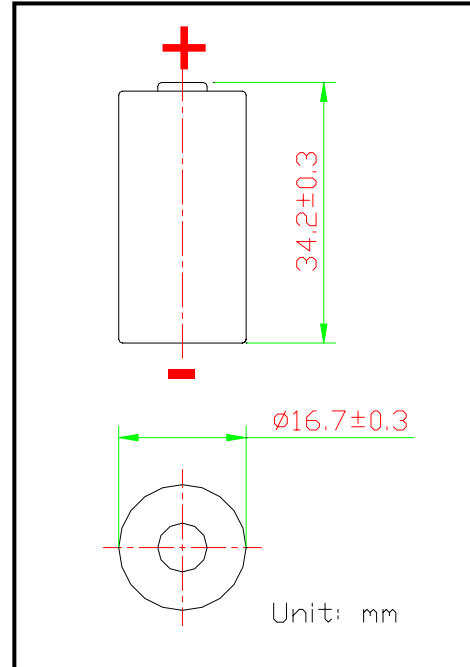

### @ Discharge Characteristics vs. Temp.

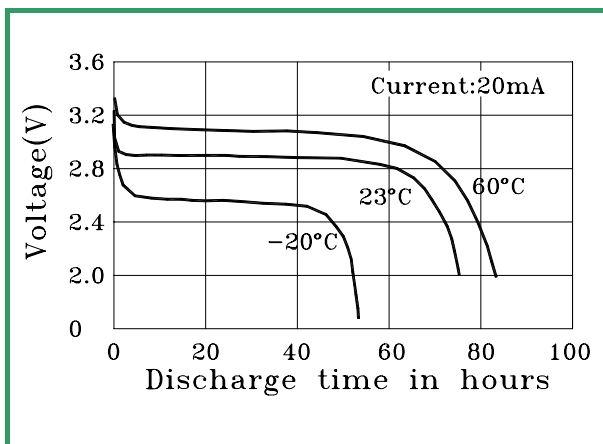

### @ Pulse Discharge Characteristics

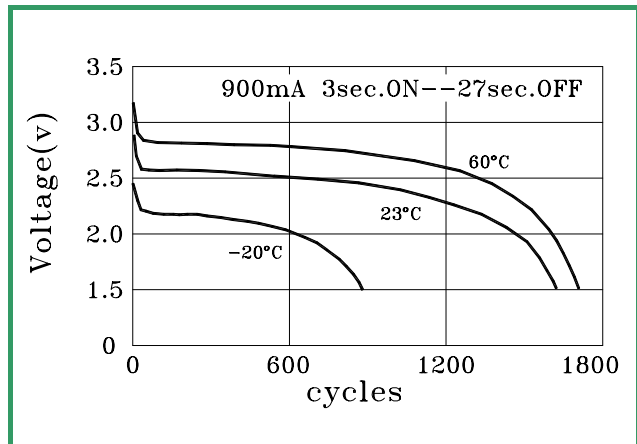

Add: No.48 B Zone, Pingnan Industrial Park, Huizhou, Guangdong, China  
P.C.: 516006  
Tel: +86-752-2652968, +86-13502288850  
Fax: +86-752-2652186  
Website: [www.cn-battery.net](http://www.cn-battery.net)  
E-mail: [zhou01@yeah.net](mailto:zhou01@yeah.net)

