


CR17335E-R

Cylindrical Lithium Battery



@ Specification

Nominal Voltage (V)		3.0
Dimensions	Diameter (mm)	16.5+/-0.3
	Height (mm)	33.0+/-0.5
	Apx. Weight (g)	20.0
Standard Discharge Current (mA)		5
Nominal Capacity (mAh)		2000
Maximum Continuous Discharge Current (mA)		1000
Maximum pulse Discharge Current (mA)		2500
Temperature Range (°C)		-40/85

@ Dimensions

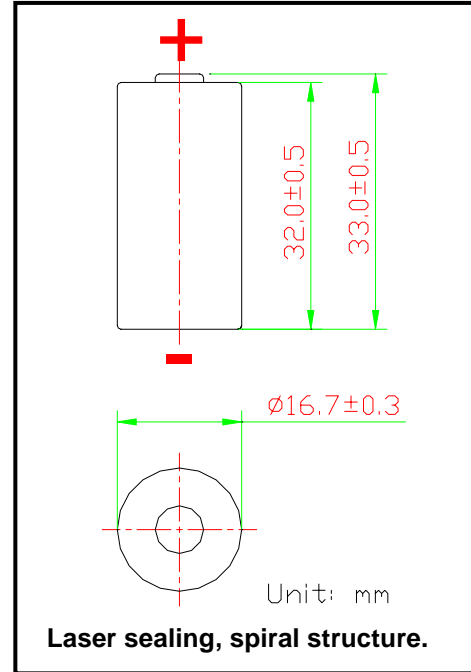

@ Discharge Characteristics vs. Temp.

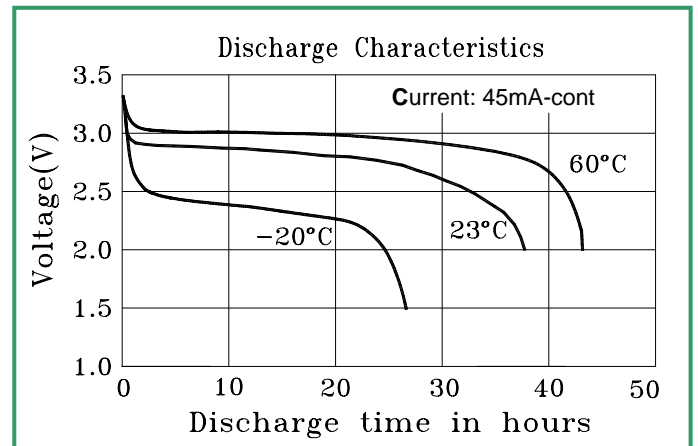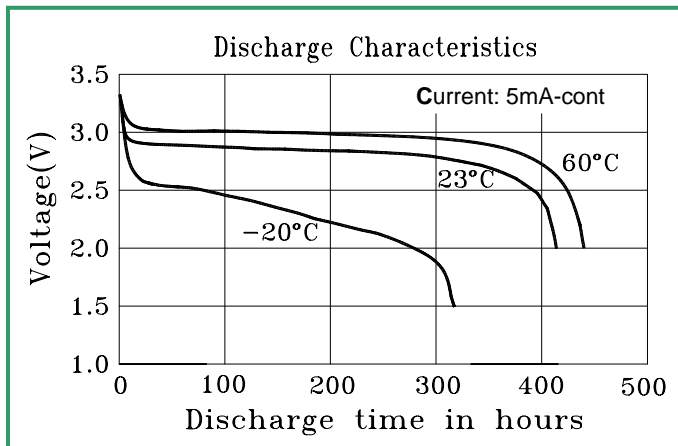

Add: No.48 B Zone, Pingnan Industrial Park, Huizhou, Guangdong, China
P.C.: 516006
Tel: +86-752-2652968, +86-13502288850
Fax: +86-752-2652186
Website: www.cn-battery.net
E-mail: zhou01@yeah.net

