


# CR17450

## Cylindrical Lithium Battery


### @ Specification

<b>Nominal Voltage (V)</b>		<b>3.0</b>	
<b>Dimensions</b>	<b>Diameter (mm)</b>	<b>16.5+/-0.3</b>	
	<b>Height (mm)</b>	<b>44.5+/-0.5</b>	
	<b>Apx. Weight (g)</b>	<b>23.0</b>	
<b>Standard Discharge Current (mA)</b>		<b>20</b>	<b>1</b>
<b>Nominal Capacity (mAh)</b>		<b>2000</b>	<b>2400</b>
<b>Maximum Continuous Discharge Current (mA)</b>		<b>1000</b>	
<b>Maximum pulse Discharge Current (mA)</b>		<b>3000</b>	
<b>Temperature Range (°C)</b>		<b>-40/60</b>	


### @ Dimensions

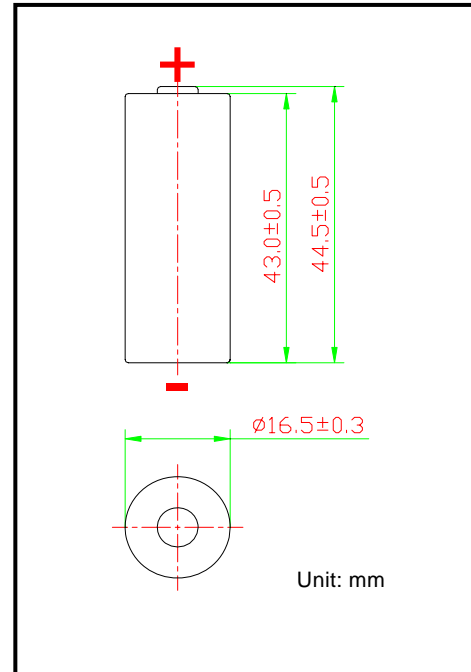

### @ Discharge Characteristics vs. Temp.

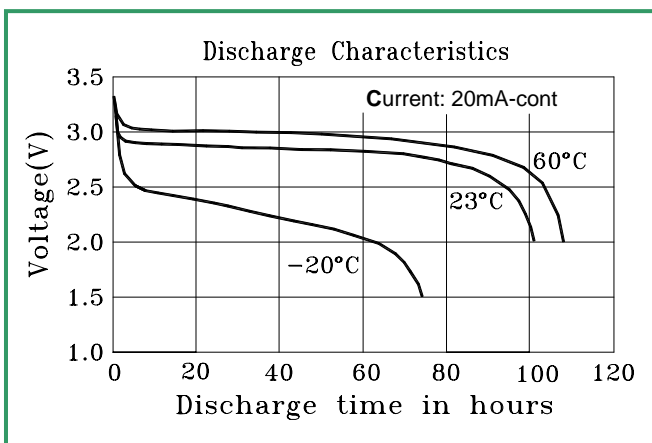

### @ Pulse Discharge Characteristics

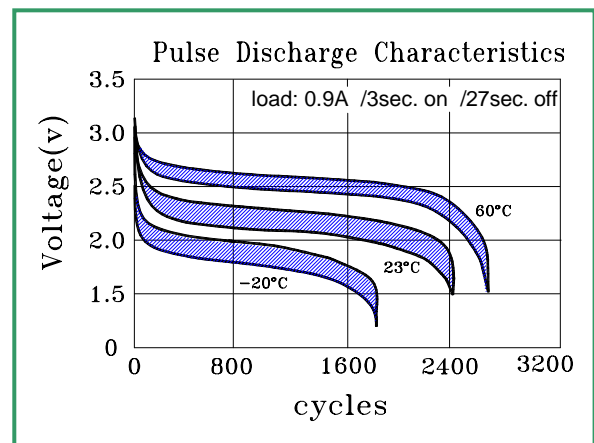

**Add:** No.48 B Zone, Pingnan Industrial Park, Huizhou, Guangdong, China  
**P.C.:** 516006  
**Tel:** +86-752-2652968, +86-13502288850  
**Fax:** +86-752-2652186  
**Website:** [www.cn-battery.net](http://www.cn-battery.net)  
**E-mail:** [zhou01@yeah.net](mailto:zhou01@yeah.net)

