


CR2

Cylindrical Lithium Battery


@ Specification

Nominal Voltage (V)		3.0
Dimensions	Diameter (mm)	15.3+/-0.3
	Height (mm)	26.9+/-0.3
	Apx. Weight (g)	11
Standard Discharge Current (mA)		10
Nominal Capacity (mAh)		750
Maximum Continuous Discharge Current (mA)		800
Maximum pulse Discharge Current (mA)		1500
Temperature Range (°C)		-40/70


@ Dimensions

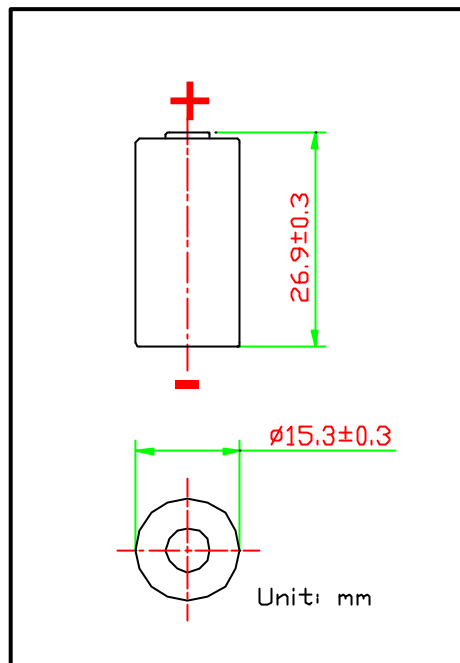

@ Discharge Characteristics vs. Temp.

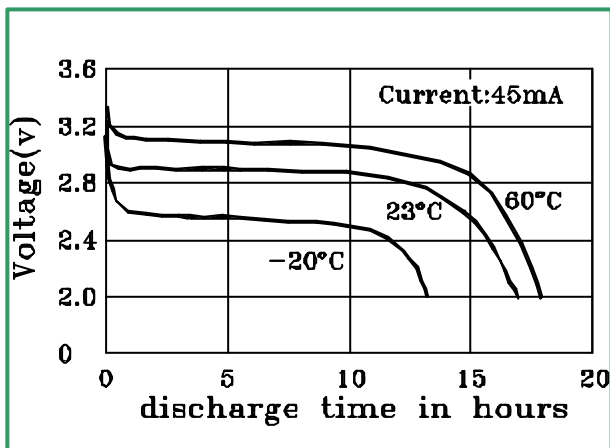

@ Pulse Discharge Characteristics

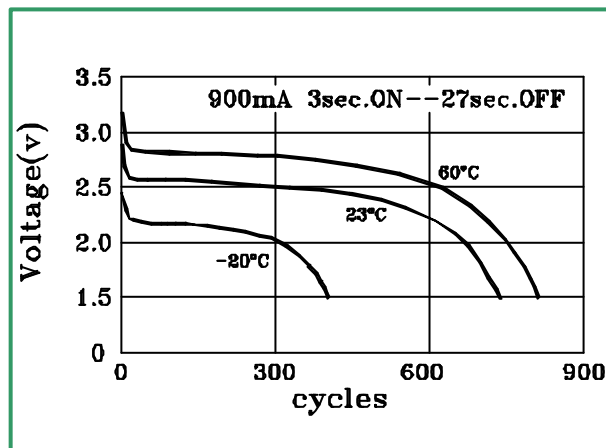

Add: No.2, Gutang'ao Industrial Area, Huizhou, Guangdong, China
P.C.: 516008
Tel: +86-752-2382997, +86-13502288850
Fax: +86-752-2382786
Website: www.cn-battery.net
E-mail: zhou01@yeah.net

