

**ER26500M**


**Cylindrical Lithium Battery**

@ Specification

Reference Size: C



<b>Nominal Voltage (V)</b>		<b>3.6</b>
<b>Dimensions</b>	<b>Diameter (mm)</b>	<b>26.2(Max.)</b>
	<b>Height (mm)</b>	<b>50.0(Max.)</b>
	<b>Apx. Weight (g)</b>	<b>56</b>
<b>Nominal Capacity (mAh)</b>		<b>5800</b>
<b>Maximum Continuous Discharge Current (mA)</b>		<b>1000</b>
<b>Maximum pulse Discharge Current (mA)</b>		<b>2000</b>
<b>Volume (cm<sup>3</sup>)</b>		<b>27</b>
<b>Temperature Range (°C)</b>		<b>-55/85</b>

@ Dimensions

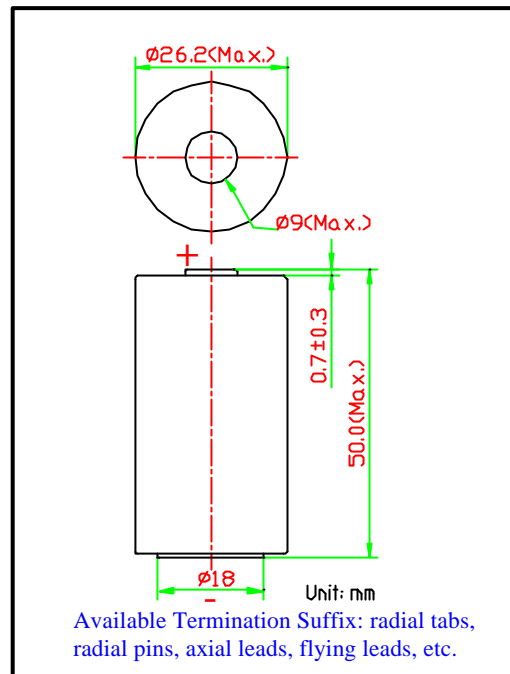

@ Discharge Characteristics vs. Current

@ Capacity vs. Current & Temp.

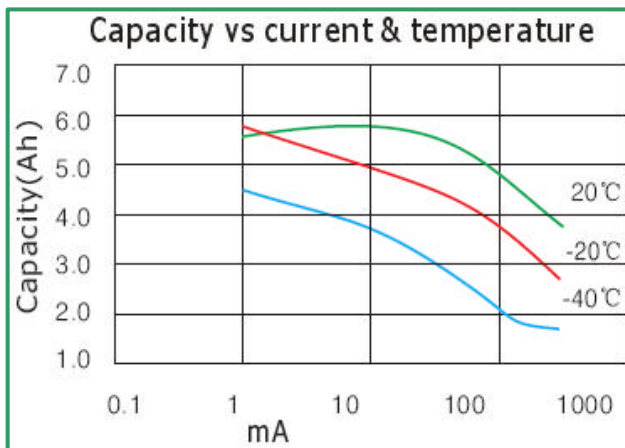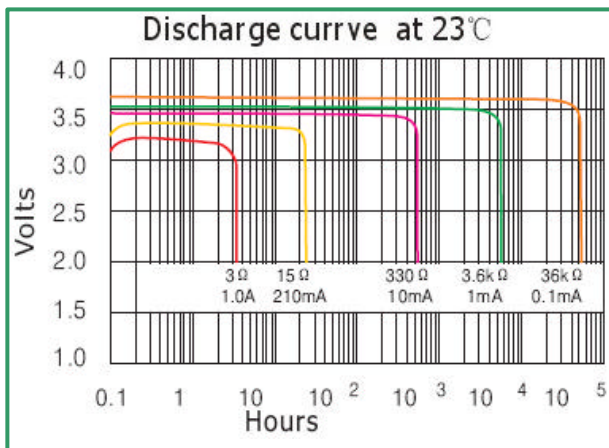

Add: No.2, Gutang'ao Industrial Area, Huizhou, Guangdong, China  
 P.C.: 516008  
 Tel: +86-752-2382997, +86-13502288850  
 Fax: +86-752-2382786  
 Website: [www.cn-battery.net](http://www.cn-battery.net)  
 E-mail: [zhou01@yeah.net](mailto:zhou01@yeah.net)

